

**TECHNOLOGY COMPONENTS AND REQUIREMENTS OF LTE ADVANCED TO
ENHANCE 4G CAPABILITIES**

Aqsa Sayed
Austin TX, USA
aqsa.sayed89@gmail.com

Abstract

LTE-Advanced (LTE-A) represents a significant evolution of the Long Term Evolution (LTE) standard or 4G, aimed at meeting the requirements set by the International Telecommunication Union (ITU). LTE Advanced was part of Release 10 of 3GPP (Third Generation Partnership Project) to help achieve higher data rates for the ever-growing user demand. The purpose of this paper is to encapsulate the technological components for LTE Advanced and methodologies that enable LTE-A to deliver enhanced performance, including carrier aggregation, advanced antenna techniques, and improved spectral efficiency.

Keywords: LTE-Advanced, International Mobile Telecommunications Advanced (IMT-Advanced), Carrier Aggregation, MIMO

I. INTRODUCTION

As the reliance on wireless systems & applications increases, the demand for better Quality of Service (QoS) & seamless connection is on the rise. The requirements for LTE-Advanced are to better the LTE or 4G capabilities covered under Rel 8 of 3GPP & ensure it surpasses the requirements of IMT-Advanced such as Data rate of 1Gbps.

The technology components of Long Term Evolution (LTE)-Advanced as per Release 10 are: Carrier aggregation, advanced antenna techniques, CoMP (Coordinated multipoint) transmission & reception. Additionally, LTE-A is required to be backward compatible with LTE.

II. REQUIREMENTS: LTE ADVANCED

International Mobile Telecommunications - Advanced (IMT-Advanced) is a concept for mobile systems with capabilities beyond IMT-2000. The candidate recommendations for IMT-Advanced were submitted to ITU in 2009, one for LTE-Advanced from 3GPP and the other IEEE 802.16m. IMT-Advanced function within 3GPP is called LTE-Advanced. The key requirements included [1]:

- a high degree of commonality of functionality worldwide while retaining the flexibility to support a wide range of services and applications in a cost-efficient manner.
- compatibility of services within IMT and with fixed networks.
- capability of interworking with other radio access systems.
- high quality mobile services.
- user equipment suitable for worldwide use.
- User-friendly applications, services and equipment.

- Worldwide roaming capability.
- Enhanced peak data rates to support advanced services and applications (100 Mbit/s for high and 1 Gbit/s for low mobility were established as targets for research).

The assumption one would make for LTE- Advanced would be the need for changes at the network architecture level or changes in hardware requirements. However, the LTE-Advanced was devised only as evolution to the existing LTE infrastructure in place, hence being able to deploy LTE-A spectrum without incurring major cost, making it a cost efficient & seamless transition. Table1 shows the requirements established & evidently LTE-A fulfils all IMT-A requirements.

Parameters	LTE	LTE-Advanced	IMT-Advanced
Spectral Efficiency DL	16.3(4x4MIMO)	30(8x8 MIMO)	15 (4x4MIMO)
Spectral Efficiency UL	4.32(64QAM)	15 (4x4MIMO)	6.75(2x4 MIMO)
Peak Data Rate (DL)	300Mbps	1Gbps	1Gbps(<u>low</u> mobility) 100Mbps(High mobility)
Peak Data Rate (UL)	75Mbps	500Mbps	
Spectrum Allocation	20MHz	100MHz	>40MHz
Cell edge user spectral efficiency DL	0.06(4X2 MIMO)	0.09(4x2 MIMO)	0,075(4x2 MIMO)
Cell Spectral efficiency DL	1.87(4x2MIMO)	2.6(4x2MIMO)	2.6(5x2 MIMO)

Table1: Performance Requirements for LTE, LTE-Advanced & IMT-Advanced. ([3] [4] [5])

III. KEY TECHNOLOGICAL COMPONENTS

A. Carrier Aggregation (CA)

One of the main features of LTE-Advanced is carrier aggregation, which allows operators to utilize their existing spectrum & combine multiple LTE carriers into a single data channel to increase aggregated bandwidth thereby increasing the network capacity.

This can be applied to either FDD or TDD LTE carriers, for LTE FDD carriers the UE can be allocated resources based on the component carrier in UL & DL. Component carrier (CC) is an aggregated carrier & can have bandwidths of 1.4,3,5,10,15,20MHz, since the maximum number of component carriers that can be aggregated is limited to five, the total transmission bandwidth can be maximized to 100MHz. Each CC can have the same or different bandwidth in FDD.

In TDD the number of CC will have the same bandwidth in UL & DL.

There are 3 Types of Carrier Aggregation in Downlink:

- Intra band carrier aggregation -Contiguous- Within the operating frequency bands, carriers are contiguous & is the simplest form of CA as the signal is considered as one enlarged signal.
- Intra band carrier aggregation -non-contiguous- Within the operating frequency band, carriers are not adjacent to each other, reason being operators are allocated bands based on availability

& auctions.

- Inter band carrier Aggregation-This is a more complex form of CA, as it's not the same frequency band, carriers from different bands are aggregated.

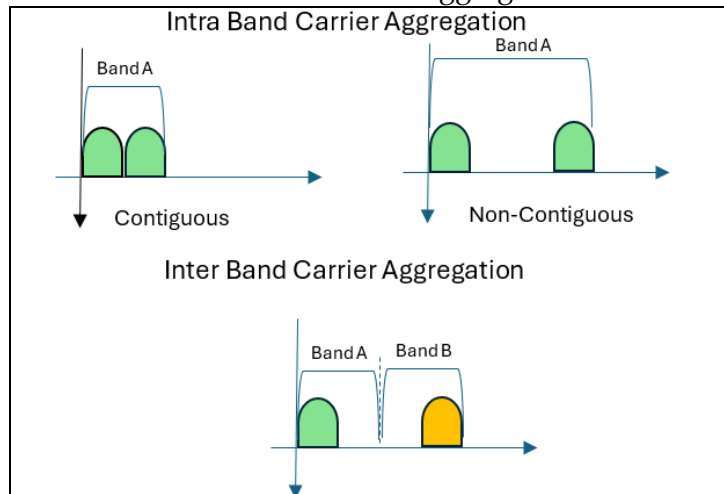


Figure 1: Types of Carrier Aggregation [7]

LTE-A UEs can receive multiple carrier components & it gives the flexibility to seamlessly switch from lower bandwidth to a carrier aggregated band making the system efficient. Carrier aggregation benefits end user with enhanced data rates and improved utilization of fragmented spectrum resources at operator level. Performing carrier aggregation makes it cost effective if the bands are contiguous which is not the usual scenario, thereby requiring additional transceivers to send/receive signal adding cost.

B. Advanced Antenna Techniques

Our second important feature of LTE-Advanced technology framework is MIMO system, spatial multiplexing & beamforming, The combination of higher order MIMO transmission, beamforming offers ways to improve spectral efficiency & network capacity.

Multiple Input Multiple Outputs (MIMO): The LTE Rel8 defines the multiple input multiple output antenna system for LTE. We can have four transmit antennas for downlink & two transmit antennas for uplink. Under LTE-A 8 transmit antennas are possible & uplink can go up to 4 transmit antenna thereby improving spectral efficiency. As per 3GPP antenna port is defined that any LTE symbol transmitted via the same antenna port will undergo the same propagation conditions.

Beamforming is defined as a single direct signal transmission towards specific users to enhance signal quality and reduce interference. It can be utilized with carrier components in Carrier aggregation system. Beamforming & MIMO have become a merged system. It can help improve capacity & end user throughput in dense urban & urban areas.

C. Coordinated Multipoint (CoMP):

Coordinates transmission and reception is a technique used in LTE-A across multiple base stations to improve coverage at cell edge. It basically means when the UE is on cell edge, it can receive multiple signals from cell sites & the UE is able to transmit multiple signals to the different cell

sites. CoMP requires synchronization of the transmitted signal between eNBs as well as processing of the received signal. There are two approaches for the synchronization between eNBs, one is the decentralized process in which there are independent eNBs that work by signalling between eNBs, possible chances of failure are higher due to delays & no ACK. The second approach involves centralized eNB & the Remote Radio Unit (RRU), where the eNB directly transmits baseband over fiber to RRUs. This method involves less delays but incurs higher costs.

To make CoMP successful, it will require good backhaul connection with low latency & timely data transmission, as well as stable coordination between eNBs which is challenging. Both methods are added cost to CAPEX.

D. Enhanced Inter-Cell Interference Coordination (eICIC):

Inter Cell Interference (ICIC) was defined under Rel8 for LTE. In ICIC cell edge users get a different resource allocated when the eNBs can exchange interference information over X2 link. This with CoMP helped reduce interference & improve performance at cell edge. The ICIC techniques work mostly for homogeneous network, from one eNB to another. With Rel10 & above we see the functionality of having eICIC implemented for homogenous & heterogeneous networks.

Heterogeneous networks (HetNet) are comprised of Macro eNB along with Pico/Femto & Small Cell. In a dense urban area where the Macro eNB & the Small Cell are using the same DL frequency, but different sub frames. eICIC has two main features, Almost Blank Sub frame & Cell Range Extension. With ABS cell edge users connected to a Pico or small cell avoid interference with a macro even when using co-channel, just in different time frame. In Cell Range Extension, the Pico or the small cell has a conventional cell edge where the DL from the Small cell is the strongest & the cell range extension where the UL loss to the small cell is still small compared to macro but the DL signal from the macro is strong, in this case UE stays connected to the small cell or Pico without handover or being interfered.

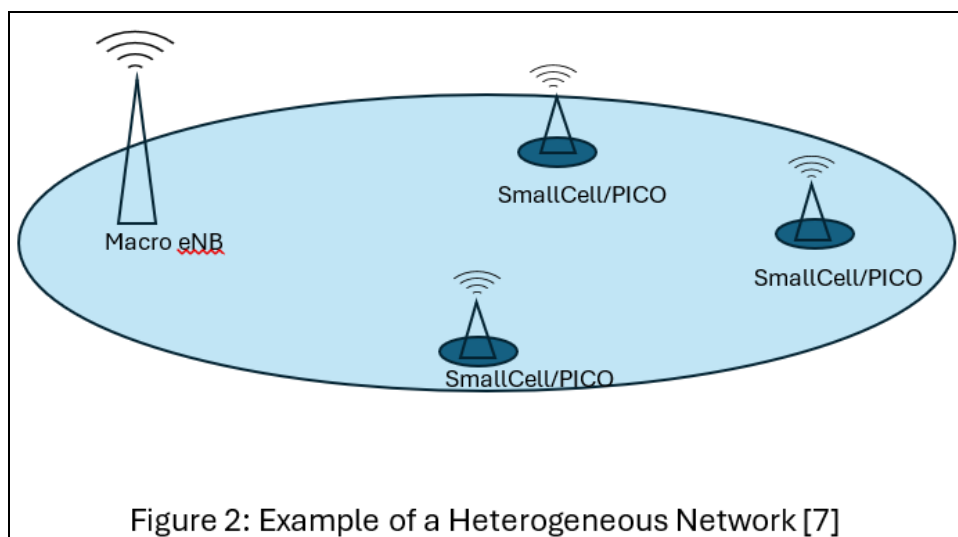


Figure 2: Example of a Heterogeneous Network [7]

IV. CHALLENGES AND FUTURE DIRECTIONS:

A. Challenges:

1. *Interference Management in Heterogeneous Networks (HetNet):*

LTE-Advanced addresses interference challenges with advanced techniques like Coordinated Multipoint (CoMP) and Enhanced Inter-Cell Interference Coordination (eICIC). However, managing interference remains complex in HetNets, which consist of a mix of macro eNBs, small cells, and pico/femto cells, especially when they operate over the same frequency spectrum. Coordinating these networks and ensuring seamless interference management, particularly in dense urban environments, requires robust algorithms and real-time coordination between the base stations. [10][11]

In this context, while techniques like CoMP and eICIC help reduce interference, they increase signalling overhead, network complexity, and demand higher quality backhaul links. As the network grows in density and complexity with more small cells, these challenges will become more pronounced, requiring more efficient interference management methods to maintain performance and minimize latency. Energy consumption in mobile networks is a critical issue for LTE-Advanced, especially as operators deploy large-scale networks with multiple base stations, antennas, and component carriers. [11]

2. *Spectrum Fragmentation and Bandwidth Limitations:*

Despite the advancements made by carrier aggregation, LTE-Advanced still faces the challenge of spectrum fragmentation, which complicates the efficient utilization of available resources. Aggregating carriers across non-contiguous frequency bands is a solution, but this requires additional hardware, and when carriers are not contiguous, it can incur additional costs due to the need for multiple transceivers. As the demand for higher data rates increases, operators will need to explore new methods to address spectrum scarcity and fragmentation while minimizing operational costs. [9][12]

3. *Legacy System Integration:*

LTE-Advanced is designed to be backward compatible with legacy LTE systems, integrating LTE-A technologies into existing networks without disrupting current services is a significant challenge. Operators must manage network evolution while ensuring that existing LTE networks continue to operate efficiently and meet user expectations. This requires a delicate balance between maintaining legacy infrastructure and deploying the new advanced technologies, which often necessitate higher capital expenditure. [2]

B. Future Directions:

1. **5G Evolution:** LTE-Advanced is a steppingstone toward 5G, and its features such as carrier aggregation, MIMO, and CoMP will evolve to support the future 5G networks. With the advent of 5G, further enhancements in spectrum efficiency, latency, and energy efficiency will be crucial. Researchers are already exploring new transmission technologies, such as Massive MIMO (MMIMO) and millimetre-wave (mmWave) frequencies, which are expected to be central to 5G. LTE-A technologies will provide the foundation for the development of 5G systems by addressing some of the challenges faced by LTE-A, such as interference management, bandwidth efficiency, and device connectivity. [13]

2. **Machine Learning for Network Optimization:** The promising future directions is the application of machine learning and artificial intelligence (AI) for network management and optimization. These technologies can help in real-time decision-making for load balancing, interference mitigation, and energy efficiency. AI can also be used to predict traffic patterns and adjust network parameters dynamically to optimize performance, making the network more adaptable to changing conditions. Such intelligent systems would significantly enhance the performance of LTE-Advanced networks, making them more responsive and efficient.
3. **Network Slicing for Customizable Services:** The network slicing, which involves creating multiple virtual networks on top of a single physical network infrastructure, is an important aspect of 5G and will likely influence the evolution of LTE-Advanced. Through network slicing, operators can create customized services for different types of users, applications, or industries, each with specific performance and quality requirements. This will allow LTE-Advanced networks to offer tailored experience for diverse use cases, from enhanced mobile broadband to massive IoT (Internet of Things) applications. [14]

V. CONCLUSION

This paper provided a summary of LTE-Advanced requirements & the enhancements made by 3GPP via different Releases. These advanced features delivering better network performance will have an impact at UE level – additional transmit/receive schemes & on the network with MIMO antenna installation for better spectral efficiency & data rates. Carrier aggregation is an easy feature that can be utilized with existing LTE spectrum at no additional cost while adding throughput. LTE-Advanced will become a benchmark for the telecom industry in the coming decades. It sets a baseline for the evolution into 5G.

REFERENCES

1. 3GPP TR 36.913 V 10.0.0, March 2011; Technical Specification Group Radio Access Network; Requirements for further advancements for Evolved Universal Terrestrial Radio Access (E-UTRA) LTE-Advanced, Release 10
2. Sharma, Manish & Mishra, Prakhar. (2012). "Analysis of Enabling Techniques for LTE-Advanced and Beyond". International Journal of Future Computer and Communication. 334-338. 10.7763/IJFCC. 2012.V1.90.
3. 3GLTEinfo. (n.d.). Is LTE 4G? What is the difference between LTE and LTE Advanced?
4. 3gamerica (2009). HSPA to LTE-Advanced. [Online].
5. Martín-Sacristán, David et al. "On the Way towards Fourth-Generation Mobile: 3GPP LTE and LTE-Advanced." EURASIP Journal on Wireless Communications and Networking 2009 (2009): 1-10.
6. Interference Coordination in LTE/LTE-A (2): eICIC (enhanced ICIC) August 06, 2014 | By Dr. Michelle M. Do and Dr. Harrison J. Son (tech@netmanias.com)
7. Rohde & Schwarz. (2012). LTE-Advanced technology (Application Note 1MA169)
8. Rohde & Schwarz: Application Note 1MA111 UMTS Long Term Evolution (LTE) Technology Introduction (2009)
9. Rohde & Schwarz: Application Note 1MA166 LTE-Advanced Signals Generation and Analysis (2014)

10. Ghosh, A., Ratasuk, R., Mondal, B., Mangalvedhe, N., & Thomas, M. (2010). LTE-advanced: Next-generation wireless broadband technology. *IEEE Wireless Communication*, 17(3), 10-22.
11. Hasan, S. H., et al. (2013). "Coordinated multipoint transmission and reception in LTE-Advanced: A survey." *IEEE Communications Surveys & Tutorials*, 15(2), 751-768. DOI: 10.1109/SURV.2012.050912.00034.
12. Mangalvedhe, N., et al. (2010). "Carrier aggregation for LTE-Advanced: From concept to realization." *IEEE Transactions on Wireless Communications*, 9(8), 4386-4398. DOI: 10.1109/TWC.2010.06.090663.
13. Ratasuk, R., Ghosh, A., & Thomas, M. (2016). "5G: The Next Frontier for LTE-A Evolution." *IEEE Wireless Communications*, 23(1), 34-41. DOI: 10.1109/MWC.2016.7415545.
14. Reinders, M., et al. (2017). "Network slicing and softwarization for future 5G networks." *IEEE Communications Magazine*, 55(9), 50-58. DOI: 10.1109/MCOM.2017.1700101